




**m050**

# Coriolis Mass Flowmeters

Flow rate 1.36 to 136 kg/  
min (3 to 300 lb/min)

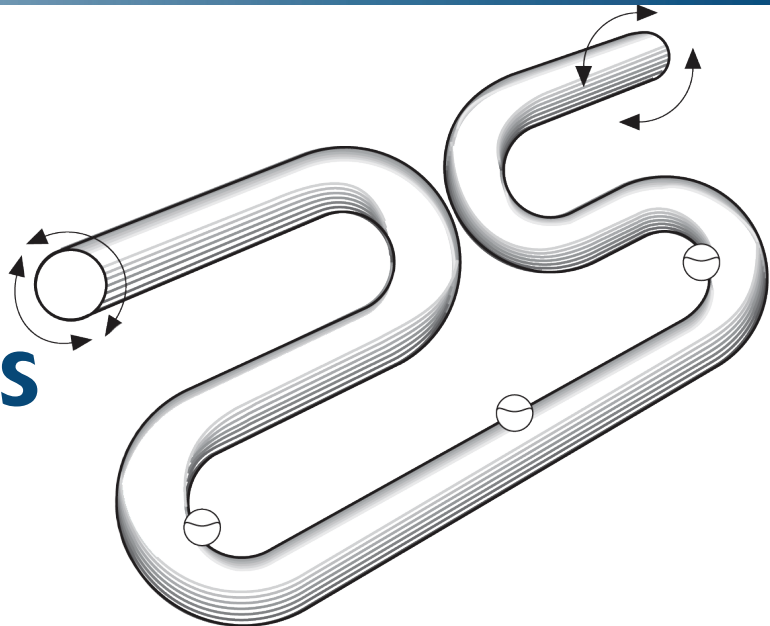

ISO 9001 Certified Manufacturing Facility

## DESCRIPTION

The **m**<sup>®</sup> m050 provides accurate, continuous direct measurement of mass, density, temperature and percent solids over the flow range 1.36 to 136 kg/min (2 to 300 lb/min).

## DESIGN FEATURES

### ACCURACY

Patented dual omega-shaped tubes provide outstanding sensitivity to Coriolis forces. **m**<sup>®</sup> mass flow accuracy is  $\pm 0.10\%$  and the mass flow rate repeatability is  $\pm 0.10\%$ . Its density accuracy is  $\pm 0.002$  g/cc over its operating range.

### LOW PRESSURE DROP AND 100:1 TURN-DOWN

The **m**<sup>®</sup> transducer is more sensitive to Coriolis forces than conventional mass flowmeters, providing a greater mechanical gain. Fluid velocity requirements are much lower to produce a given signal. This results in a lower pressure drop and unequaled 100:1 turndown. Therefore, accuracy never has to be compromised to obtain an acceptable pressure drop.

### RELIABILITY

The smooth-bore, non-obtrusive flow path is free from moving parts, seals and bellows. The omega shapes produce torsional loading instead of bending loading or improved reliability.



- Direct mass, density and temperature measurement
- Weights & Measures approved for custody transfer applications
- Patented omega-shaped flowtubes provide unequaled sensitivity to Coriolis force
- Wide 100:1 turndown
- Lowest pressure drop
- Smooth-bore, non-obtrusive flow path free from moving parts
- 316: stainless steel
- 3A-Authorized version available

## MATERIALS OF CONSTRUCTION

Wetted parts: 316L stainless steel  
 Sensor housing: 304L stainless steel

3A-Authorized version: Connection facing and flowtube surface finish is equivalent to 150 grit (Ra 32 or 0.80 µm) or better

## ELECTRONICS

DATAMATE 2200™ Mass Flow Computer:  
 (Complete information is available in Technical Specification No. TS-612)

NexGen® SFT100 Mass Flow Transmitter:  
 (Complete information is available in Technical Specification No. TS-620)

NexGen® SFT200 Mass Flow Transmitter:  
 (Complete information is available in Technical specification No. TS-621)

## HAZARDOUS AREA CLASSIFICATION TABLE



Agency	Components	Method	Class	Div/zone	Group	Temp. Class	Ambient Temp.
CSA	Transducer	Intrinsic Safety	I, II, III	1, 2	C, D, E, F, G	T5	Note 1
	Datamate 2200	Non-incendive	I	2	A, B, C, D	T3C	Note 5
	NexGen	Explosion Proof	I, II, III	1	C, D, E, F, G	T6	Note 2
Non-incendive		I	2	A, B, C, D	T4	Note 2	
LCIE	Transducer	EX ia		0, 1, 2	IIB	T5, T4, T2	Note 3
	Nexgen	EX id		1, 2	IIB	T6	Note 4

Note 1: -20°C to 40°C (-4°F to 104°F)  
 Note 2: -20°C to 65°C (-4°F to 149°F)  
 Note 3: T5 where ambient temperature is: -20°C 40°C (-4°F to 104°F)  
 T4 where ambient temperature is: +40°C to +60°C (104°F to 140°F)  
 T2 where ambient temperature is: +60°C to +200°C (140°F to 392°F)  
 Note 4: -20°C to 65°C (-4°F to 149°F)  
 Note 5: +65°C ambient

## m050 OPERATING SPECIFICATIONS

METERING ELEMENT	
<b>Connections:</b> Connection type (Flanges)	VCO: 1" female <sup>2</sup> ANSI: 1/2", 3/4", 1"; 150#, 300#, 600# RF DIN: PN40 DN15 3A-Authorized: 2" Tri-Clamp® Industrial Tri-Clamp®; 1-1/2" 2" 150lb Flat Faced <sup>3</sup>
<b>Meter:</b> Tube material Tube shape Nominal tube bore Housing Hazardous area classification Mass accuracy <sup>1</sup> Mass Repeatability Mass zero stability Turndown ratio Density range Density accuracy Density repeatability Temperature measurement Temperature accuracy Signal output	316L SST Omega 12.7 mm (1/2") 304L SST Transducer is intrinsically safe when connected to an approved mass flow computer (See table above for approval rating) ±0.10% of rate ± zero stability ±0.10% of rate ±0.0035 kg/min (0.0299 lb/min) 100:1 0.4 to 3.0 g/cc ±0.002 g/cc ±0.0005 g/cc 100 ohm platinum resistance sensor 0.56°C (±1°F) 8-core shielded twisted pair
<b>Fluid:</b> Flow rate Max. temperature Min. temperature Max. operating pressure	1.36 to 136.0 kg/min (3 to 300 lb/min) 204°C (400°F) -45°C (-50°F) 204 bar (3000 psi); limited by flange/connection rating
ASSOCIATED INSTRUMENT	
Max. Length of signal cable Electrical connections Manufacturer Meter model number Instrument model number	300m (1000ft.) 8 core Belden 89892 shielded twisted pair Screw terminal RSM, Inc. m050-XXXX0 Refer to electronics Technical Specification Form Datamate 2200: TS-612 NexGen SFT100: TS-620 NexGen SFT200: TS-621
<sup>1</sup> All calibration equipment traceable to N.I.S.T. <sup>2</sup> Mating Flanges for MT truck accessories <sup>3</sup> Only available as 1" female CAJON VCO connections. Requires Male CAJON VCO-8-VCO by SWAGELOCK®.	

# PRESSURE DROP VERSUS FLOW RATE

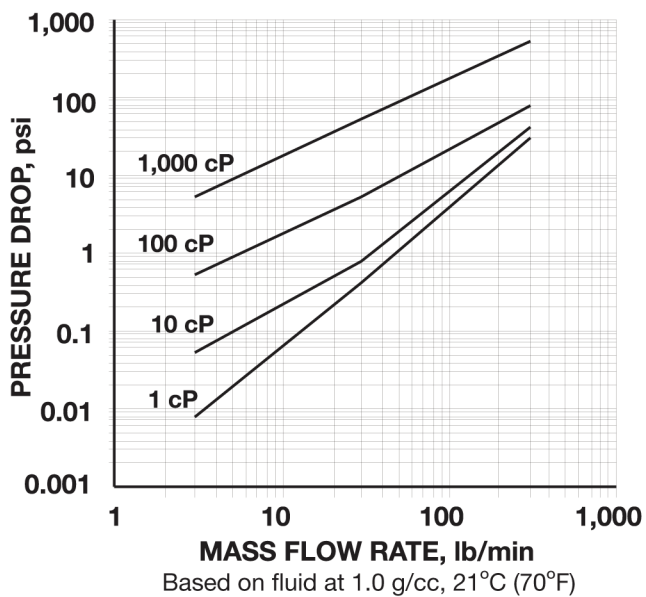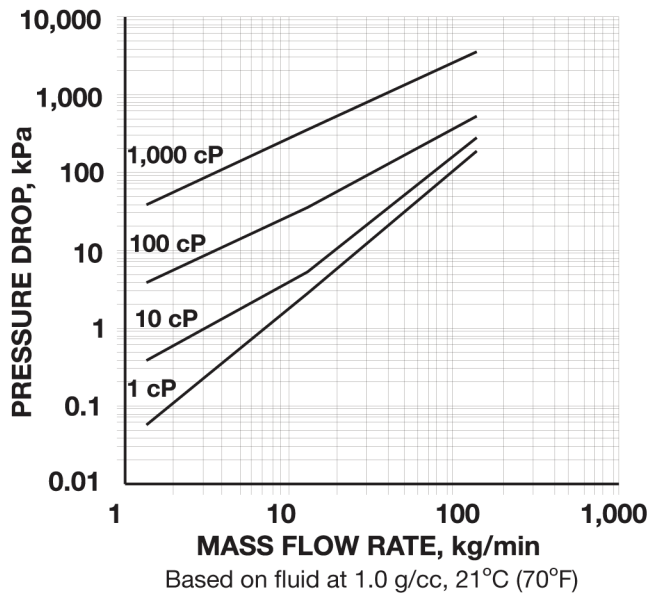

## DETERMINING PRESSURE DROP

1. Flow rate vs. pressure drop varies with viscosity. To approximate m050 pressure drop for fluids with viscosity approximating that of water, locate the point on the 1-cP curve corresponding with your desired flow rate.
2. From that point, locate the nearest horizontal line and follow it to the vertical scale on the left, which indicates pressure drop for the flow rate you selected.
3. Divide the pressure drop indicated on the graph by the specific gravity (S) of the process fluid:

$$\Delta P_{\text{actual}} = \Delta P_{\text{plotted}} / \text{Sp. gr.}$$

## CALCULATING ACTUAL ACCURACY

Use the following formula to calculate accuracy for your selected flow rate:


$$\% \text{ accuracy, } \pm_{\text{actual}} = \{[(0.0010 m) + S_0] / m\} \times 100\%$$

where:


- m = mass flow rate, kg/min or lb/min
- S<sub>0</sub> = mass zero stability, kg/min or lb/min for the m050 flowmeter

# DIMENSIONAL DATA, mm (in.)

**m050 Transducer**

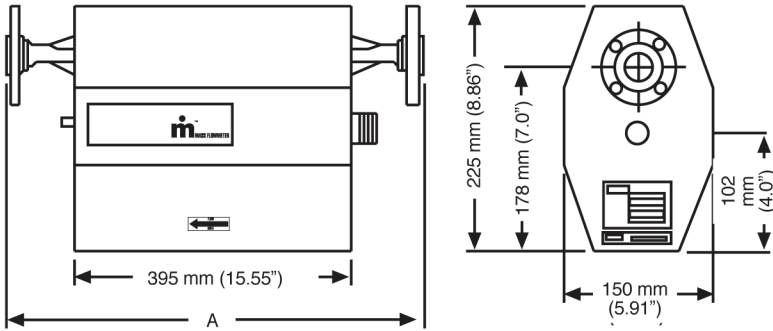

**m050 3A-Authorized Transducer**

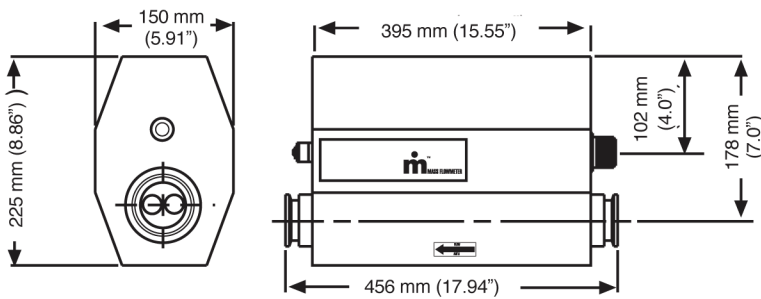

Optional 2" x 1" Tri-Clamp® eccentric reducers (P/N 101630-002) are available.

## WEIGHTS OF COMPONENTS

Transducer:	approx. 11.3kg (25 lbs)
Datamate 2200:	approx. 5.2 kg (11.5 lbs)
NexGen SFT100:	
Blind	approx. 6.4 kg (14.1 lbs)
w/Display/keypad	approx. 7.1 kg (15.6 lbs)
NexGen SFT200:	approx. 1.8 kg (4 lbs)

DIMENSIONS	
CONNECTION	A 316L SS Wetted Parts
1/2" 150# ANSI RF	559 (22.0)
1/2" 300# ANSI RF	574 (22.6)
3/4" 150# ANSI RF	559 (22.0)
3/4" 300# ANSI RF	579 (22.8)
1" 150# ANSI RF	561 (22.1)
1" 300# ANSI RF	582 (22.9)
DN15 PN40	561 (22.10)
DN25 PN40	561 (22.10)

1310 Emerald Road  
Greenwood, SC 29646  
USA  
Phone: 1.800.833.3357  
Fax: 1.864.223.0341

